Fatina

By: BurdaStyle

http://www.burdastyle.com/projects/fatina

Work, school, clubbin’, dining, this shift dress works for all moments. Depending on your mood and occasion, you can pair it with a sparkling necklace for long nights or tighten it with a sincere looking belt for the office or some socks for a cute school look. As simple as this pattern is, it is something for almost all of our users out there. Have fun!

Materials

Cotton with a habotai lining, with an invisible zipper.

Step 1

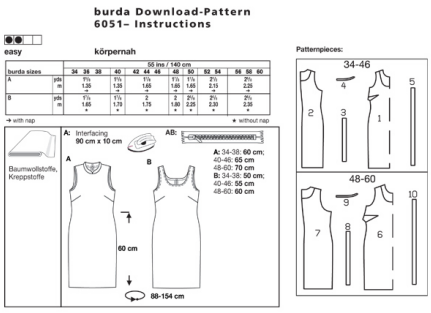

PATTERN

Sizes 2 to 14 (EU 34 to 46)

A B 1 Front piece 1x

A B 2 Back piece 2x
A B 3 Bias strips / armhole 2x
A 4 Collar 4x
B 5 Bias strips / neckline 1x
Sizes 16 to 28 (EU 48 to 60)
A B 6 Front piece 1x
A B 7 Back piece 2x
A B 8 Bias strips / armhole 2x
A 9 Collar 4x
B 10 Bias strips / neckline 1x

Fabrics: Cotton fabric, crepe fabric

Step 2

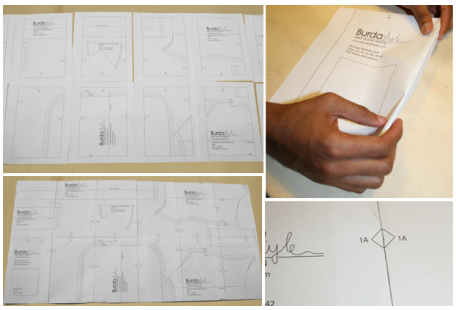

The patterns can be printed out at the copy shop. If you decide to print them at home, follow the instructions:
Paper cut for ANSI A (German DIN A4) prints:
The patterns are printed out for sizes 2 to 14 (EU 34 to 46) on 24 sheets / for sizes 16 to 28 (EU 48 to 60) on 30 sheets with a thin frame. Wait until all sheets are printed out. Arrange the sheets so that they fit together (see additional page with the overview of the prints). Fold the single sheets on the upper and right edge along the thin frame lines. Begin with the left lower sheet and then tape the frame lines together precisely.

Step 3

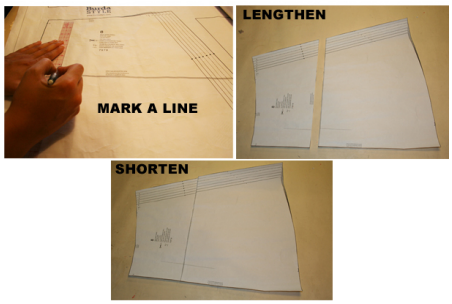

ADJUST PATTERN SIZES
Select your size according to the Burda-dimension table: dresses, blouses, jackets and coats according to the bust size, trousers and skirts according to the hip width. Change the pattern to fit your measurements if they deviate from the Burda-size chart. Cut out the pattern according to your size.
Sizes 2 to 14 (EU 34 to 46):
A: Pattern pieces 1 to 4,
B: Pattern pieces 1 to 3 and 5.

Sizes 16 to 28 (EU 48 to 60):
A: Pattern pieces 6 to 9,
B: Pattern pieces 6 to 8 and 10

Refer to our â'Adjust patterns for mixed sizesâ' technique

LENGTHENING OR SHORTENING THE PATTERN PIECES
Our pattern is calculated for a height of 5â' 6â' (168 cm). If you are taller or shorter, you can adjust the pattern pieces along the lines marked "lengthen or shorten here". This way the proper fit is maintained. Always adjust all pattern pieces along the same line to the same degree.

How to lengthen and shorten pattern pieces:
Cut the pattern pieces along the marked lines
To lengthen, slide the two halves of the pattern piece as far apart as necessary.
To shorten, overlap the two halves of the pattern piece as far as necessary. Blend the side edges.

Step 4

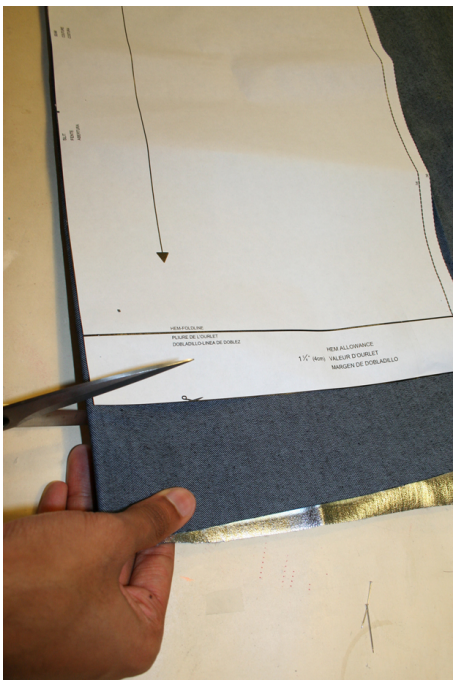

CUTTING OUT
FOLD (â' â' â' â') means: Cut on the fold, the fold being the center of the pattern piece, but never a cut edge or seam. The piece should be cut double, with the fold line forming the center line. Pattern pieces that are outlined with a broken line in the cutting diagrams are to be placed face down on the fabric. The cutting diagrams on the pattern sheet show how the pattern pieces should be placed on the fabric.

The cutting diagrams show the placement of the pattern on the fabric.
For a single layer of fabric, the pattern pieces are pinned to the right side. For double layers of fabric, the right sides are facing and the pattern pieces are pinned to the wrong side. The pattern pieces that are shown extending over the fold of the fabric in the cutting diagram should be cut last from a single layer of fabric .

Step 5



SEAM AND HEMLINE ALLOWANCES are included on an average:
1 5â“8" (4 cm) for hem, 5/8â’ (1.5 cm) for all edges and stitches. Using BURDA copying paper, transfer the lines and signs of the pattern onto the wrong side of the fabric. Instructions can be found in the packaging.

Sewing
While sewing, the right sides of the fabric are facing.
Transfer all lines of the pattern onto the right side of the fabric using basting stitches. The seam numbers show how the pieces will be sewn together. The number after the slash is representative of the sizes 16 to 28 (EU 48 to 60).

A
INTERFACING
Cut out the interfacing according to the cutting diagram and press it onto the wrong side of the fabric.

Step 6



AB
DRESS
BUST DARTS
Pin the bust darts and stitch to a point. Knot threads. Press the darts downwards. (a)

CENTER BACK SEAM / SLIT
Position the back pieces together, right sides facing. Pin the center seam. Stitch the center seam between the slit signs. Secure seam ends. Keep the slit pinned. Neaten allowances and press apart. Remove the pins from the slit. (b)

SHOULDER SEAMS
Position the front and back pieces together, right sides facing. Pin shoulder seams (seam numbers 1 / 4) and stitch. Neaten allowances and press apart.

Step 7

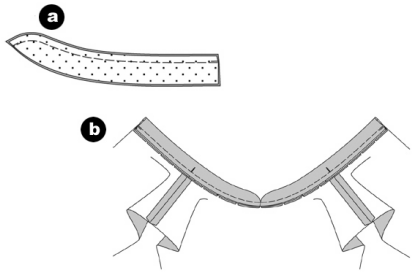

A
COLLAR
Position an interfaced and a non-interfaced collar piece together, right sides facing. Pin the edges and stitch. Trim allowances. Turn collar pieces. Pin edges and press. Pin the open edges together. (a)

Position the collar pieces onto the neckline (seam numbers 2 / 5), right sides facing; the cross lines meet the shoulder seams. Stitch. Trim allowances and snip in along the neckline. Neaten allowances and press inside the dress. (b)

Step 8



A
ZIPPER
Turn the allowances along the slit to the inside. Position the zipper under the opening and collar edges so that the little teeth are hidden. Fold the zipper strip ends inside. Stitch the zipper using a zipper foot. (a)

Step 9

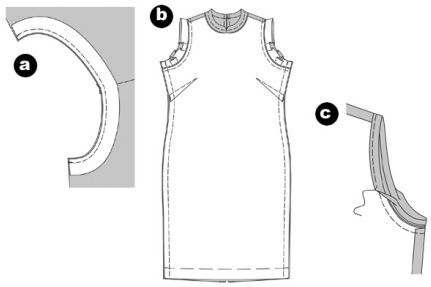

ARMHOLES
Trim allowances along the armholes to _â’ (1 cm) width.

Position the bias strips on the armhole, right sides facing, and pin. Stitch _â’ (0.7 cm) wide along the armhole edge. (a)

SIDE SEAMS
Turn the bias strips inside the armholes, over the seam line, and press.

Position the front and back pieces together, right sides facing. Pin the side seams (seam numbers 3 / 6) and stitch. Neaten allowances and press apart. (b)

Fold the bias strips over the edge to the inside, fold again and pin. On the right side of the fabric, stitch along the seam line, enclosing the bias strips. ©

Step 10

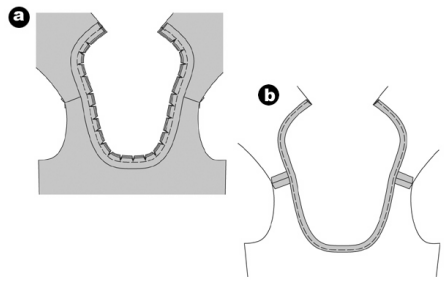

B
NECKLINE / BIAS STRIPS
Fold the bias strip lengthwise, wrong sides facing. Press.
Trim allowances along the neckline and the armholes to _â’ (1 cm) width.

Position the bias strips onto the neckline, right sides facing. The open edges are positioned on the allowance. Stitch the bias strips _â’ (1 cm). Trim allowances and snip in. (a)

Turn the bias strip to the inside, pin and press. Topstitch the neckline _â’ (0.7 cm) wide, enclosing the bias strip. (b)

Neaten the armhole in the same way as the neckline.

Apply the zipper as described above (see step 8).

Stitch the side seams. Neaten allowances and press apart. Sew the armhole allowances by hand on the bias strips.

Step 11

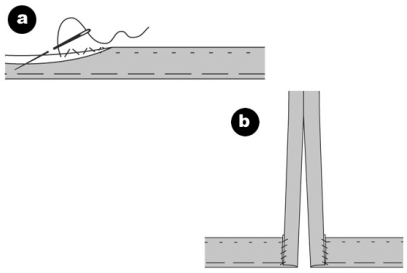

AB

HEMLINE / SLIT

Fold the slit allowances.

Neaten hemline, fold inside and press. Sew the hemline by hand (a). Turn the slit allowances inside and sew onto the hemline (b).